


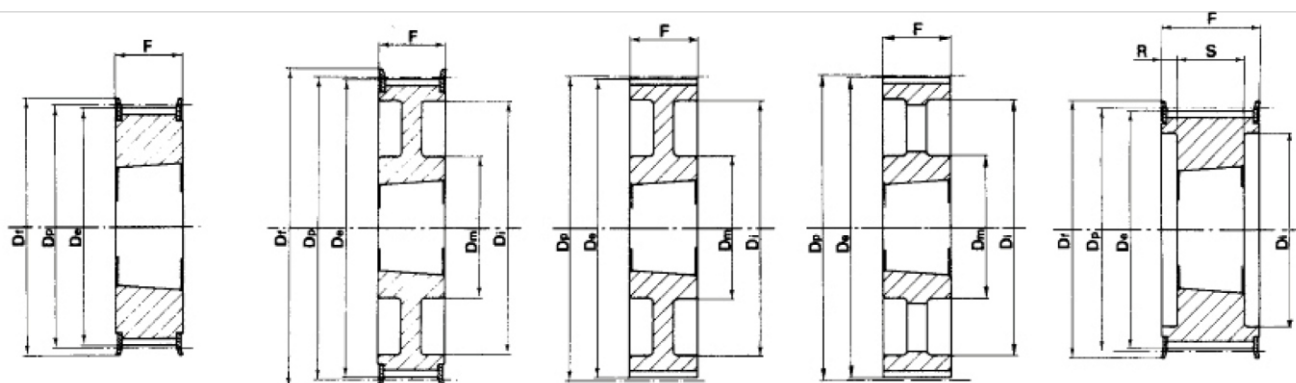


TYP 3F

TYP 3WF


TYP 3W

TYP 3A


TYP 4F

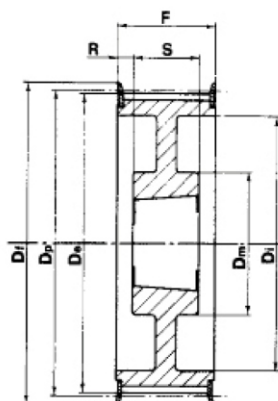


TYP 4WF

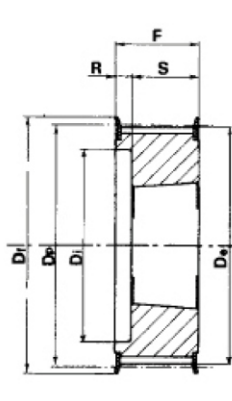


TYP 5F

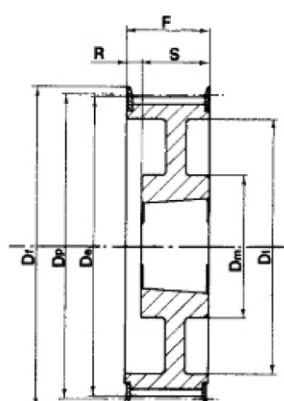


TYP 5WF

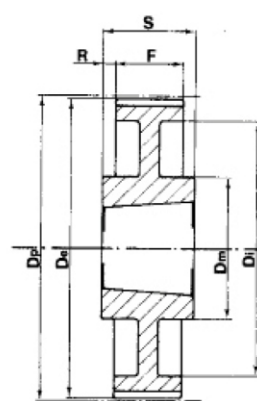


TYP 7W

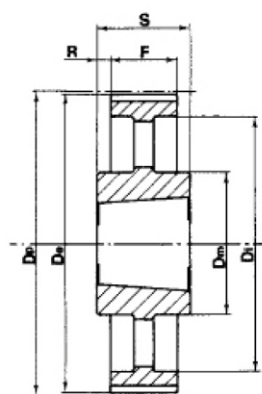


TYP 7A

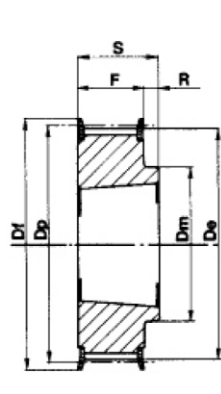


TYP 8F

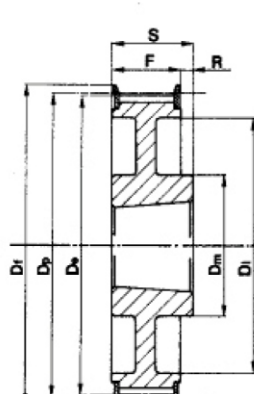

TYP 8WF

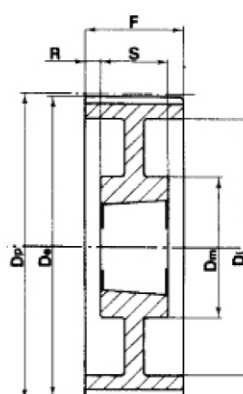

TYP 9W

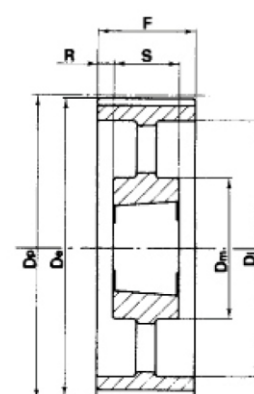

TYP 9A

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK

L 050 - 3/8" (9,525 mm) koła dla pasa o szer. 1/2" (12,7 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	18 L 050	8F	1108	28	54,57	53,81	60	45	-	19,0	22,0	3	0,2
		19 L 050	8F	1108	28	57,61	56,84	64	45	-	19,0	22,0	3	0,2
		20 L 050	8F	1108	28	60,64	59,88	66	48	-	19,0	22,0	3	0,2
		21 L 050	8F	1108	28	63,67	62,91	70	48	-	19,0	22,0	3	0,3
		22 L 050	8F	1108	28	66,70	65,94	75	51	-	19,0	22,0	3	0,3
		23 L 050	8F	1108	28	69,73	68,97	79	54	-	19,0	22,0	3	0,4
		24 L 050	8F	1108	28	72,77	72,00	79	54	-	19,0	22,0	3	0,4
		25 L 050	8F	1108	28	75,80	75,04	83	56	-	19,0	22,0	3	0,5
		26 L 050	8F	1108	28	78,83	78,07	87	60	-	19,0	22,0	3	0,5
		27 L 050	8F	1108	28	81,86	81,10	87	62	-	19,0	22,0	3	0,6
		28 L 050	8F	1108	28	84,89	84,13	91	65	-	19,0	22,0	3	0,6
		30 L 050	8F	1108	28	90,96	90,20	97	70	-	19,0	22,0	3	0,8
		32 L 050	8F	1108	28	97,02	96,26	102	74	-	19,0	22,0	3	0,9
		36 L 050	8F	1108	28	109,15	108,39	115	85	-	19,0	22,0	3	1,2
		40 L 050	8F	1610	42	121,28	120,51	128	88	-	19,0	25,0	3	1,5
ŻELIWO	BEZ FLANSZY	44 L 050	8WF	1610	42	133,40	132,64	142	88	110	19,0	25,0	6	1,8
		48 L 050	8WF	1610	42	145,53	144,77	150	88	120	19,0	25,0	6	2,3
		60 L 050	7W	1610	42	181,91	181,51	-	92	166	19,0	25,0	6	2,0
		72 L 050	7A	1610	42	218,30	217,53	-	92	202	19,0	25,0	6	3,0
		84 L 050	7A	1610	42	254,68	253,90	-	92	236	19,0	25,0	6	4,0
		96 L 050	7A	2012	50	291,06	290,30	-	106	270	19,0	32,0	13	5,5
		120 L 050	7A	2012	50	363,83	363,07	-	106	343	19,0	32,0	13	6,8

L 075 - 3/8" (9,525 mm) koła dla pasa o szer. 3/4" (19,05 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	18 L 075	3F	1108	28	54,57	53,81	60	-	-	25,0	25,0	-	0,2
		19 L 075	3F	1108	28	57,61	56,84	64	-	-	25,0	25,0	-	0,3
		20 L 075	3F	1108	28	60,64	59,88	66	-	-	25,0	25,0	-	0,3
		21 L 075	3F	1108	28	63,67	62,91	70	-	-	25,0	25,0	-	0,4
		22 L 075	3F	1108	28	66,70	65,94	75	-	-	25,0	25,0	-	0,4
		23 L 075	3F	1108	28	69,73	68,97	79	-	-	25,0	25,0	-	0,4
		24 L 075	3F	1108	28	72,77	72,00	79	-	-	25,0	25,0	-	0,5
		25 L 075	3F	1108	28	75,80	75,04	83	-	-	25,0	25,0	-	0,6
		26 L 075	3F	1108	28	78,83	78,07	87	-	-	25,0	25,0	-	0,6
		27 L 075	3F	1108	28	81,86	81,10	87	-	-	25,0	25,0	-	0,7
		28 L 075	3F	1108	28	84,89	84,13	91	-	-	25,0	25,0	-	0,7
		30 L 075	3F	1108	28	90,96	90,20	97	-	-	25,0	25,0	-	0,9
		32 L 075	3F	1108	28	97,02	96,26	102	-	-	25,0	25,0	-	1,0
		36 L 075	3F	1610	42	109,15	108,39	115	-	-	25,0	25,0	-	1,2
		40 L 075	3F	1610	42	121,28	120,51	128	-	-	25,0	25,0	-	1,7
ŻELIWO	BEZ FLANSZY	44 L 075	3WF	1610	42	133,40	132,64	142	90	110	25,0	25,0	-	2,1
		48 L 075	3WF	1610	42	145,53	144,77	150	92	120	25,0	25,0	-	2,5
		60 L 075	3W	1610	42	181,91	181,15	-	92	166	25,0	25,0	-	3,0
		72 L 075	3A	1610	42	218,30	217,53	-	92	202	25,0	25,0	-	4,0
		84 L 075	7A	2012	50	254,68	253,90	-	92	236	25,0	32,0	-	5,2
		96 L 075	7A	2012	50	291,06	290,30	-	106	270	25,0	32,0	3,5	6,5
		120 L 075	7A	2012	50	363,83	363,07	-	106	343	25,0	32,0	3,5	7,6

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK



L 100 - 3/8" (9,525 mm) koła dla pasa o szer. 1" (25,4 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	18 L 100	5F	1108	28	54,57	53,81	60	-	38	31,0	22,0	9,0	0,2
		19 L 100	5F	1108	28	57,61	56,84	64	-	38	31,0	22,0	9,0	0,3
		20 L 100	5F	1108	28	60,64	59,88	66	-	45	31,0	22,0	9,0	0,4
		21 L 100	5F	1108	28	63,67	62,91	70	-	45	31,0	22,0	9,0	0,4
		22 L 100	5F	1108	28	66,70	65,94	75	-	48	31,0	22,0	9,0	0,4
		23 L 100	5F	1108	28	69,73	68,97	79	-	52	32,0	22,0	10,0	0,5
		24 L 100	5F	1108	28	72,77	72,00	79	-	52	32,0	22,0	10,0	0,6
		25 L 100	5F	1108	28	75,80	75,04	83	-	54	32,0	22,0	10,0	0,6
		26 L 100	5F	1108	28	78,83	78,07	87	-	60	32,0	22,0	10,0	0,7
		27 L 100	5F	1108	28	81,86	81,10	91	-	60	32,0	22,0	10,0	0,8
		28 L 100	5F	1108	28	84,89	84,13	91	-	65	32,0	22,0	10,0	0,8
		30 L 100	5F	1210	32	90,96	90,20	97	-	71	32,0	25,0	7,0	0,9
		32 L 100	5F	1210	32	97,02	96,26	102	-	75	32,0	25,0	7,0	1,0
		36 L 100	5F	1610	42	109,15	108,39	115	-	86	32,0	25,0	7,0	1,4
		40 L 100	5F	1610	42	121,28	120,51	128	-	96	32,0	25,0	7,0	1,7
		44 L 100	5WF	1610	42	133,40	132,64	142	90	110	32,0	25,0	-	2,3
		48 L 100	5WF	1610	42	145,53	144,77	150	92	120	32,0	25,0	7,0	2,7
ŻELIWO	BEZ FLANSZY	60 L 100	9W	1610	42	181,91	181,51	-	92	166	32,0	25,0	3,5	2,4
		72 L 100	3A	2012	50	218,30	217,53	-	92	202	32,0	32,0	-	4,4
		84 L 100	3A	2012	50	254,68	253,90	-	92	236	32,0	32,0	-	6,0
		96 L 100	3A	2012	50	291,06	290,30	-	106	270	32,0	32,0	-	7,1
		120 L 100	3A	2012	50	363,83	363,07	-	106	343	32,0	32,0	-	8,5

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK

H 100 - 1/2" (12,7 mm) koła dla pasa o szer. 1" (25,4 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	16 H100	5F	1108	28	64,68	63,31	70	-	45	31,0	22,0	9,0	0,4
		18 H100	5F	1210	32	72,77	71,39	70	-	52	31,0	25,0	6,0	0,5
		19 H100	5F	1210	32	76,81	75,44	83	-	56	31,0	25,0	6,0	0,6
		20 H100	5F	1210	32	80,55	79,48	87	-	60	31,0	25,0	6,0	0,7
		21 H100	5F	1210	32	84,89	83,52	91	-	64	32,0	25,0	7,0	0,8
		22 H100	5F	1210	32	88,94	87,56	93	-	67	32,0	25,0	7,0	0,9
		23 H100	5F	1610	42	92,98	91,61	97	-	70	32,0	25,0	7,0	0,9
		24 H100	5F	1610	42	97,02	95,65	102	-	74	32,0	25,0	7,0	1,0
		25 H100	5F	1610	42	101,06	99,69	106	-	77	32,0	25,0	7,0	1,0
		26 H100	5F	1610	42	105,11	103,73	112	-	82	32,0	25,0	7,0	1,2
		27 H100	5F	1610	42	109,15	107,78	115	-	85	32,0	25,0	7,0	1,3
		28 H100	5F	1610	42	113,19	111,82	120	-	90	32,0	25,0	7,0	1,5
		30 H100	5F	1610	42	121,28	119,90	128	-	98	32,0	25,0	7,0	1,7
		32 H100	5WF	1610	42	129,36	127,99	135	80	106	32,0	25,0	7,0	2,0
		36 H100	5WF	1610	42	145,53	144,16	150	92	121	32,0	25,0	7,0	2,7
		40 H100	5WF	1610	42	161,70	160,33	168	92	138	32,0	25,0	7,0	3,6
		44 H100	3WF	2012	50	177,87	176,50	184	106	152	32,0	32,0	-	3,8
		48 H100	3WF	2012	50	194,04	192,67	200	106	169	32,0	32,0	-	3,2
ŻELIWO	BEZ FLANSZY	60 H100	9A	2012	50	242,55	241,18	-	92	223	34,0	32,0	1,0	4,8
		72 H100	9A	2012	50	291,06	289,69	-	92	270	34,0	32,0	1,0	5,7
		84 H100	9A	2012	50	339,57	338,20	-	92	318	34,0	32,0	1,0	6,8
		96 H100	7A	2517	60	388,08	386,71	-	106	366	34,0	45,0	5,5	8,2
		120 H100	7A	2517	60	485,10	483,73	-	106	462	34,0	45,0	5,5	12,1

H 150 - 1/2" (12,7 mm) koła dla pasa o szer. 1,5" (38,10 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	18 H150	5F	1210	32	72,77	71,39	79	-	52	45,0	25,0	20,0	0,6
		19 H150	5F	1210	32	76,81	75,44	83	-	56	45,0	25,0	20,0	0,7
		20 H150	5F	1210	32	80,55	79,48	87	-	60	45,0	25,0	20,0	0,8
		21 H150	5F	1210	32	84,89	83,52	91	-	64	45,0	25,0	20,0	1,0
		22 H150	5F	1210	32	88,94	87,56	93	-	67	45,0	25,0	20,0	1,2
		23 H150	5F	1610	42	92,98	91,61	97	-	70	45,0	25,0	20,0	1,3
		24 H150	5F	1610	42	97,02	95,65	102	-	74	45,0	25,0	20,0	1,0
		25 H150	5F	1610	42	101,06	99,69	106	-	77	45,0	25,0	20,0	1,2
		26 H150	5F	1610	42	105,11	103,73	112	-	82	45,0	25,0	20,0	1,4
		27 H150	5F	1610	42	109,15	107,78	115	-	85	45,0	25,0	20,0	1,6
		28 H150	5F	1610	42	113,19	111,82	120	-	90	45,0	25,0	20,0	1,8
		30 H150	5F	1610	42	121,28	119,90	128	-	98	45,0	25,0	20,0	2,3
		32 H150	5WF	1610	42	129,36	127,99	135	80	106	45,0	25,0	20,0	2,3
		36 H150	5WF	1610	42	145,53	144,16	150	92	121	45,0	25,0	20,0	3,1
		40 H150	5WF	1610	42	161,70	160,33	168	92	138	45,0	25,0	20,0	4,0
		44 H150	5WF	2012	50	177,87	176,50	184	106	152	45,0	32,0	13,0	4,4
		48 H150	5WF	2012	50	194,04	192,67	200	106	169	45,0	32,0	13,0	4,8
ŻELIWO	BEZ FLANSZY	60 H150	9A	2012	50	242,55	241,18	-	92	223	46,0	32,0	7,5	5,4
		72 H150	9A	2012	50	291,06	289,69	-	92	270	46,0	32,0	7,5	6,5
		84 H150	9A	2012	50	339,57	338,20	-	92	318	46,0	32,0	7,5	8,4
		96 H150	9A	2517	60	388,08	386,71	-	106	366	46,0	45,0	0,5	11,0
		12 H150	9A	2517	60	485,10	483,73	-	106	462	46,0	45,0	0,5	14,8

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK

H 200 - 1/2" (12,7 mm) koła dla pasa o szer. 2" (50,8 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	18 H200	5F	1210	32	72,77	71,39	79	-	52	58,0	25,0	33,0	0,8
		19 H200	5F	1210	32	76,81	75,44	83	-	56	58,0	25,0	33,0	0,9
		20 H200	5F	1610	42	80,55	79,48	87	-	60	58,0	25,0	33,0	1,0
		21 H200	5F	1610	42	84,89	83,52	91	-	64	58,0	25,0	33,0	1,7
		22 H200	5F	1610	42	88,94	87,56	93	-	67	58,0	25,0	33,0	1,5
		23 H200	5F	1610	42	92,98	91,61	97	-	70	58,0	25,0	33,0	1,8
		24 H200	5F	1610	42	97,02	95,65	102	-	74	58,0	25,0	33,0	1,5
		25 H200	5F	1610	42	101,06	99,69	106	-	77	58,0	25,0	33,0	1,5
		26 H200	5F	1610	42	105,11	103,73	112	-	82	58,0	25,0	33,0	1,8
		27 H200	5F	1610	42	109,15	107,78	115	-	85	58,0	25,0	33,0	1,9
		28 H200	5F	1610	42	113,19	111,82	120	-	90	58,0	25,0	33,0	1,9
		30 H200	5F	1610	42	121,28	119,90	128	-	98	58,0	25,0	33,0	2,3
		32 H200	5F	2012	50	129,36	127,99	135	-	106	58,0	32,0	26,0	3,0
		36 H200	5WF	2012	50	145,53	144,16	150	102	121	58,0	32,0	26,0	3,0
		40 H200	5WF	2012	50	161,70	160,33	168	106	140	58,0	32,0	26,0	3,6
		44 H200	5WF	2012	50	177,87	176,50	184	106	150	58,0	32,0	26,00	4,0
ŻELIWO	BEZ FLANSZY	48 H200	5WF	2517	60	194,04	193,67	200	119	168	58,0	45,0	13,0	4,6
		60 H200	9A	2517	60	242,55	241,18	-	119	223	60,0	45,0	7,5	7,0
		72 H200	9A	2517	60	291,06	289,69	-	119	270	60,0	45,0	7,5	8,0
		84 H200	9A	2517	60	339,57	338,20	-	119	318	60,0	45,0	7,5	9,0
		96 H200	9A	2517	60	388,08	386,71	-	119	366	60,0	45,0	7,5	10,0
		120 H200	9A	2517	60	485,10	483,73	-	119	462	60,0	45,0	7,5	13,4

H 300 - 1/2" (12,7 mm) koła dla pasa o szer. 3" (76,2 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
STAL	Z FLANSZĄ	20 H300	4F	1615	42	80,85	79,48	87	--	65	84,0	38,0	23,0	1,5
		21 H300	4F	1615	42	84,89	83,52	91	-	65	84,0	38,0	23,0	1,2
		22 H300	4F	1615	42	88,94	87,56	93	-	67	84,0	38,0	23,0	1,6
		23 H300	4F	1615	42	92,98	91,61	97	-	70	84,0	38,0	23,0	1,8
		24 H300	4F	1615	42	97,02	95,65	102	-	74	84,0	38,0	23,0	2,0
		25 H300	4F	1615	42	101,06	99,69	106	-	77	84,0	38,0	23,0	2,0
		26 H300	4F	1615	42	105,11	103,73	112	-	82	84,0	38,0	23,0	2,7
		27 H300	4F	2012	50	109,15	107,78	115	-	85	84,0	32,0	26,0	3,0
		28 H300	4F	2012	50	113,19	111,82	120	-	90	84,0	32,0	26,0	2,4
		30 H300	4F	2012	50	121,28	119,90	128	-	98	84,0	32,0	26,0	2,9
		32 H300	4F	2517	60	129,36	127,99	135	-	106	84,0	45,0	19,5	3,3
		36 H300	4F	2517	60	145,53	144,16	150	-	121	84,0	45,0	19,5	4,5
		40 H300	4F	2517	60	161,70	160,33	168	-	138	84,0	45,0	19,5	6,0
		44 H300	4WF	2517	60	177,87	176,50	184	119	150	86,0	45,0	20,5	6,6
		48 H300	4WF	2517	60	194,04	192,67	200	119	168	86,0	45,0	20,5	7,6
ŻELIWO	BEZ FLANSZY	60 H300	9A	2517	60	242,55	241,18	-	119	223	86,0	45,0	20,5	8,4
		72 H300	9A	2517	60	291,06	289,69	-	119	270	86,0	45,0	20,5	10,4
		84 H300	9A	2517	60	339,57	338,20	-	119	318	86,0	45,0	20,5	12,5
		96 H300	9A	3030	75	388,08	386,71	-	150	366	86,0	76,0	5,0	14,2
		120 H300	9A	3030	75	485,10	483,73	-	150	462	86,0	76,0	5,0	18,8

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK

XH 200 - 7/8" (22,225 mm) koła dla pasa o szer. 2" (50,8 mm)

INFORMACJE DODATKOWE	RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
ŻELIWO	Z FLANSZĄ	18XH200	5F	2517	60	127,34	124,55	140	-	95	64	45	19
		20XH200	5F	2517	60	141,49	138,69	154	-	110	64	45	19
		22XH200	5F	2517	60	155,64	152,84	168	-	120	64	45	19
		24XH200	5F	2517	60	169,79	166,99	184	-	135	64	45	19
		26XH200	5F	2517	60	183,94	181,14	200	-	150	64	45	19
		28XH200	5F	2517	60	198,08	195,29	212	120	165	64	45	9,5
		30XH200	4WF	2517	60	212,23	209,44	226	120	180	64	45	9,5
		32XH200	4WF	2517	60	226,38	223,59	240	120	195	64	45	9,5
	BEZ FLANSZY	40XH200	4WF	3020	75	282,98	280,18	296	160	245	64	51	9,5
		48XH200	9W	3020	75	339,57	336,78	-	160	300	64	51	6,5
		60XH200	7A	3535	90	424,47	421,67	-	190	385	64	89	12,5
		72XH200	7A	3535	90	509,40	506,56	-	190	470	64	89	12,5
		84XH200	7A	3535	90	594,25	591,46	-	190	555	64	89	12,5
		96XH200	7A	3535	90	679,15	676,35	-	190	640	64	89	12,5
		120XH200	7A	3535	90	848,93	846,14	-	190	810	64	89	12,5

XH 300 - 7/8" (22,225 mm) koła dla pasa o szer. 3" (76,2 mm)

INFORMACJE DODATKOWE	RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
ŻELIWO	Z FLANSZĄ	18 XH 300	5F	2517	60	127,34	124,55	140	-	95	90	45	45
		20 XH 300	5F	2517	60	141,49	138,69	154	-	110	90	45	45
		22 XH 300	5F	2517	60	155,64	152,84	168	-	120	90	45	45
		24 XH 300	5F	2517	60	169,79	166,99	184	-	135	90	45	45
		26 XH 300	5F	2517	60	183,94	181,14	200	-	150	90	45	45
		28 XH 300	5F	3020	75	198,08	195,29	212	120	165	90	51	39
		30 XH 300	5F	3020	75	212,23	209,44	226	120	180	90	51	39
		32 XH 300	5F	3020	75	226,38	223,59	240	120	195	90	51	39
	BEZ FLANSZY	40 XH 300	4WF	3020	75	282,98	280,18	296	160	245	90	51	19,5
		48 XH 300	9A	3020	75	339,57	336,78	-	160	300	90	51	19,5
		60 XH 300	9A	3535	90	424,47	421,67	-	190	385	90	89	0,5
		72 XH 300	9A	3535	90	509,40	506,56	-	190	470	90	89	0,5
		84 XH 300	7A	4040	100	594,25	591,46	-	190	555	90	120	6
		96 XH 300	7A	4040	100	679,15	676,35	-	190	640	90	120	6
		120 XH 300	7A	4040	100	848,93	846,14	-	190	810	90	120	6

KOŁA ZĘBATE CALOWE POD TULEJĘ TAPER LOCK

XH 400 - 7/8" (22,225 mm) koła dla pasa o szer. 4" (101,6 mm)

INFORMACJE DODATKOWE		RODZAJ	TYP	TULEJA	OTWÓR MAX	Dp	De	Df	Dm	Di	F	S	R	WAGA KG
ŻELIWO	Z FLANSZĄ	18 XH 400	5F	2517	60	127,34	124,55	140	-	95	119	45	74	-
		20 XH 400	5F	2517	60	141,49	138,69	154	-	110	119	45	74	-
		22 XH 400	5F	2517	60	155,64	152,84	168	-	120	119	45	74	-
		24 XH 400	5F	3020	75	169,79	166,99	184	-	135	119	51	68	-
		26 XH 400	5F	3020	75	183,94	181,14	200	-	150	119	51	68	-
		28 XH 400	5F	3020	75	198,08	195,29	212	120	165	119	51	68	-
		30 XH 400	5F	3020	75	212,23	209,44	226	120	180	119	51	68	-
		32 XH 400	5F	3020	75	226,38	223,59	240	120	195	119	51	68	-
	BEZ FLANSZY	40 XH 400	4WF	3535	90	282,98	280,18	296	160	245	119	89	15	-
		48 XH 400	9W	3535	90	339,57	336,78	-	190	300	119	89	15	-
		60 XH 400	9A	4040	100	424,47	421,67	-	190	385	119	102	8,9	-
		72 XH 400	9A	4040	100	509,40	506,56	-	190	470	119	102	8,9	-
		84 XH 400	9A	4040	100	594,25	591,46	-	190	555	119	102	8,9	-
		96 XH 400	9A	4040	100	679,15	676,35	-	190	640	119	102	8,9	-
		120 XH 400	9A	4040	100	848,93	846,14	-	190	810	119	102	8,9	-